

*Nextion
Generation*



*bella, sensibile, robusta,
sicura e precisa
mi chiamo Kolossal 250 I K
beautiful, sensitive, sturdy,
reliable and accurate
my name is Kolossal 250 I K*



250 I K

MACCHINA CONFORME ALLE DIRETTIVE
98/37/CEE - 73/23/CEE - 89/336/CEE
NORMA EUROPEA EN 1974:
Affettatrici - Requisiti di sicurezza e di igiene.

DOTAZIONI DI SERIE

- Blocco meccanico vela
- Anello paralama
- Riparo sul piatto
- Impianto elettrico IPX3
- Materiali antiossidanti
- Lama tedesca RASSPE/G+B
- Affilatoio, Parafetta e Piatto porta merce completamente smontabili senza utensili, per un'accurata pulizia
- Garanzia: 1 anno

SLICER IN COMPLIANCE WITH DIRECTIVES
98/37/CEE - 73/23/CEE - 89/336/CEE
AND WITH STANDARD EN 1974:
Slicing Machines - Safety and Hygiene
Requirements.

STANDARD FEATURES


- Mechanical block for gauge plate
- Blade guard
- Finger guard
- IPX3 electrical protection
- Antioxidant materials
- Blade: german G+B/RASSPE
- Built-in blade sharpener, Deflector, Meat plate: completely removable for careful cleaning
- Guarantee: one year

MANCONI&C s.r.l.
21040 SUMIRAGO (VA) ITALY
Via Varese, 8
Tel. 0331/994292 - Fax 0331/995577
www.manconi.it - info@manconi.it



DIMENSIONI DIMENSIONS 250 I K

A*	577
B	503
C	427
D	457
E	347
F	197
G	250

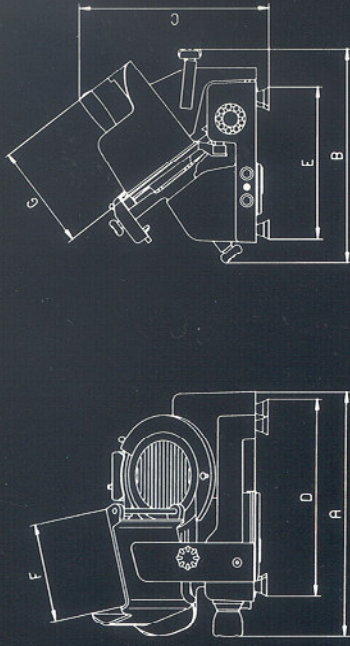

* Dimensione di massimo ingombro con piatto porta merce a fine corsa
* Overall measurements with carriage support at the end of its stroke

CARATTERISTICHE TECNICHE

	250 I K
Diametro lama	mm 250
Giri lama al minuto	n° 200
Motore 220-230V Monofase	kW 0,206
Motore 220-230/380-400V Trifase	kW 0,125
Corsa carrello	mm 250
Peso netto macchina	kg 28,5

TRASMISSIONE AD INGRANAGGIO E VITE SENZA FINE

SPECIFICATION

	250 I K
Blade diameter	mm 250
Blade speed	n° 200
220-230 V single-phase motor	kW 0,206
220-230/380-400 three-phase motor	kW 0,125
Carriage travel	mm 250
Net weight of the machine	kg 28,5

GEAR BOX TRANSMISSION

CAPACITÀ DI TAGLIO

	250 I K
Ø	mm 170
▣	mm 190x135
Spessore max. di taglio	mm 19

SLICE CAPACITY

	250 I K
Ø	mm 170
▣	mm 190x135
Maximum slice thickness	mm 19

