




Kolossal 330 IK



MANCONI & C
Fabbrica Affettatrici

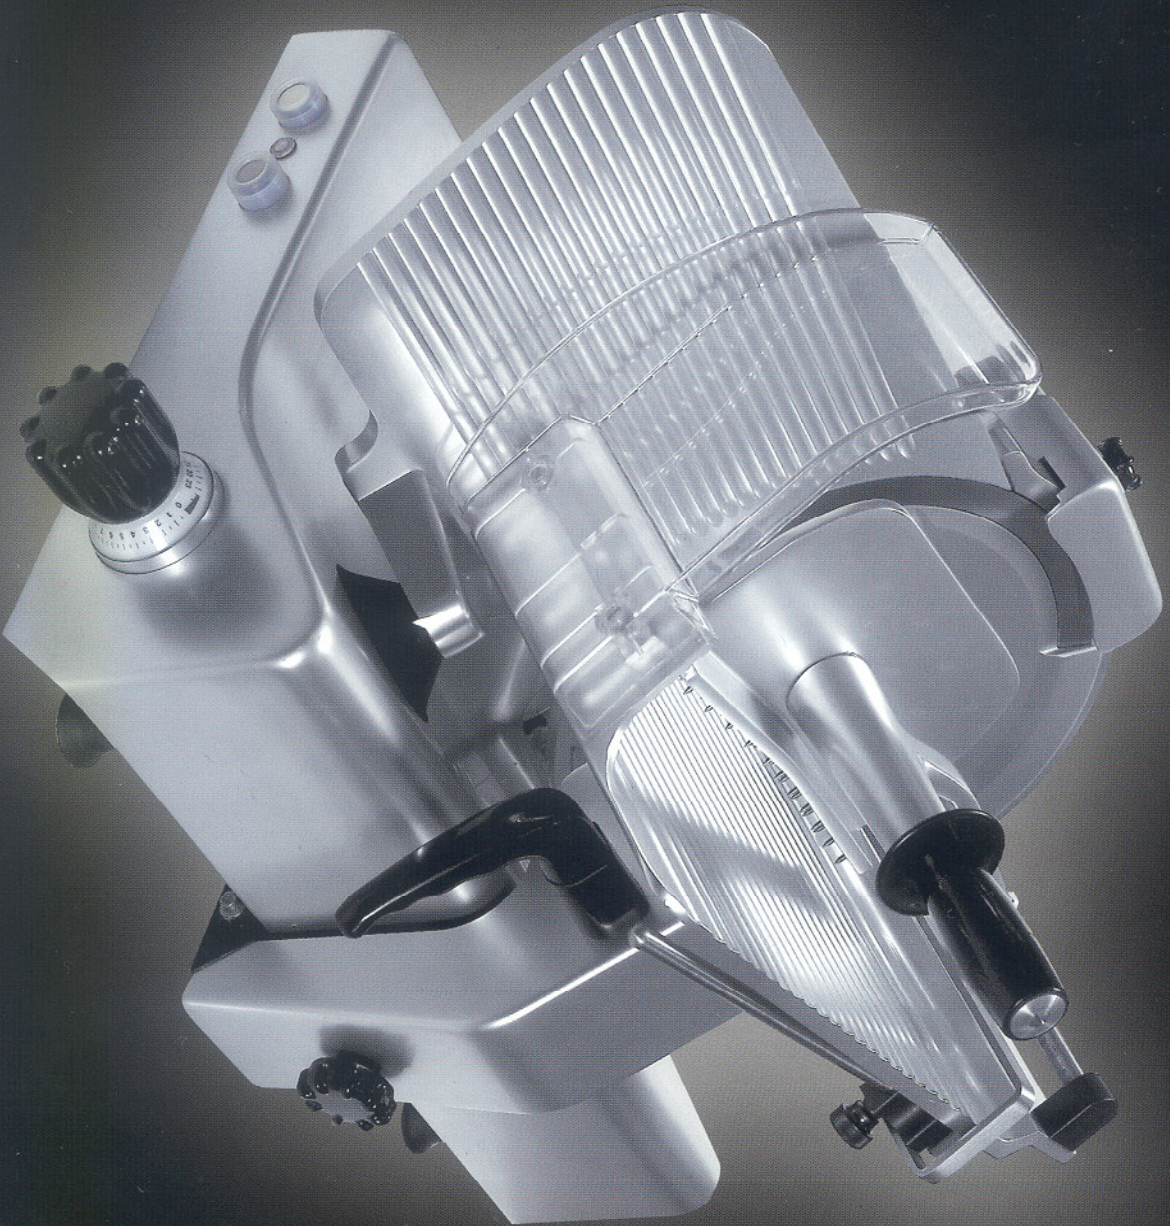

- *Trasmissione a ingranaggi.*
- *Affilato incorporato, subito disponibile e di facile impiego.*
- *Grande capacità e precisione di taglio.*
- *Altezza di carico ridotta, per diminuire la fatica.*
- *Piatto portamerce con pressamerce basculante in alluminio con puntine, oppure zigrinato.*
- *Superfici in alluminio lucidato a specchio e accurati canali di scorrimento, per diminuire gli attriti e semplificare la pulizia.*
- *Base di appoggio ribotta.*
- *Piatto eclissabile a rotazione; affilato, coprilama, parafetta e pressamerce zigrinato asportabili per un'accurata pulizia.*
- *Dispositivo ferma merce di serie.*
- *Conforme alle direttive europee 98/37/CEE, 73/23CEE, 89/336/CEE ed alla norma europea EN 1974.*


- *Gear box transmission.*
- *Built-in sharpener, right way available and easy to be used.*
- *Great capacity and precision slicing.*
- *Low loading height, to reduce strain.*
- *Carriage with swinging remnant holder in aluminum with spikes, or sharpened.*
- *Ultra smooth, polished aluminum surfaces and careful slip grooves, to reduce friction and simplify cleaning.*
- *Reduced counter space.*
- *Tilting away carriage; sharpener, blade guard, product deflector and sharpened remnant holder removable for a well done cleaning.*
- *Adjustable food fence, as standard.*
- *In compliance with European Directives 98/37/CEE, 73/23/CEE, 89/336/CEE and with European Standard EN 1974.*



MANCONI&C
Fabbrica Affettatrici

Manconi&C srl

21040 Sumirago (VA) - Italy - via Varese, 8
Tel. +39 0331 994.292 - Fax +39 0331 995.577
www.manconi.it - info@manconi.it

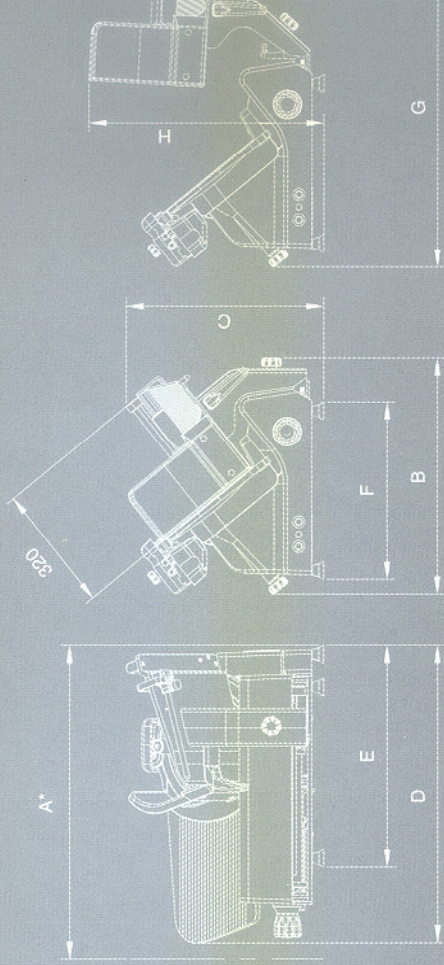

* Dimensione di massimo ingombro con piatto porta merce a fine corsa / Overall measurements with product holder at the end of its

Caratteristiche Tecniche - 330 IK

Dimensioni d'ingombro	(D x B x C) 745 x 592 x 498 mm
Superficie di appoggio	(E x F) 556 x 445 mm
Ingombro di lavoro	(A x G x H) 786 x 784 x 593 mm
Diametro lama	330 mm
Velocità lama	200 g/min (50Hz) - 255 g/min (60Hz)
Capacità di taglio	Ø 240 mm, oppure 210 x 290 mm
Spessore felle	da 0 a 24 mm
Protezione elettrica	IPX3 (Motore IPX5)
Peso netto	48 kg
Caratteristiche elettriche	230V / 50Hz / 360W c.a. monofase 400V / 50Hz / 280W c.a. trifase 120V / 60Hz / 360W c.a. monofase

Technical Specifications - 330 IK

Overall dimensions	(D x B x C) 745 x 592 x 498 mm
Installation area	(E x F) 556 x 445 mm
Working area	(A x G x H) 786 x 784 x 593 mm
Blade diameter	330 mm
Blade speed	200 rpm (50Hz) - 255 rpm (60Hz)
Slicing capacity	Ø 240 mm, or 210 x 290 mm
Slice thickness	0 to 24 mm
Electrical protection	IPX3 (Motor IPX5)
Net weight	48 Kg
Electrical specifications	230V / 50Hz / 360W a.c. monophase 400V / 50Hz / 280W a.c. threephase 120V / 60Hz / 360W a.c. monophase

